




Flame Retardant · Smoke Suppressant

**Kemgard Synergist also Lowers NBS Smoke Density
Neoprene Conveyor Belt Cover Compound**

Application Bulletin #2510

Neoprene Rubber

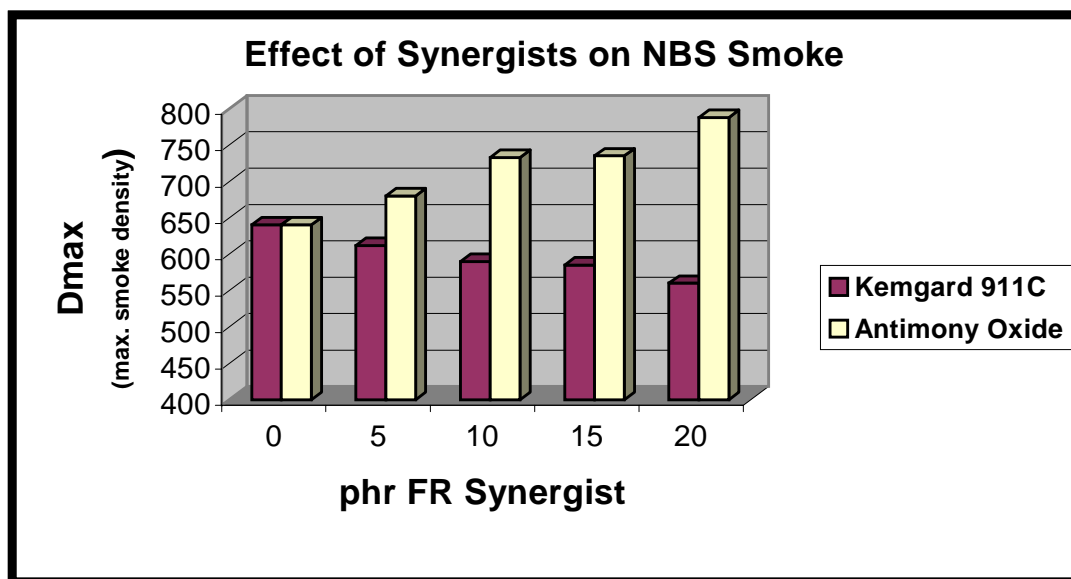

Common Ingredients

*Polychloroprene (Neoprene GW, DuPont)
High Activity Magnesia - 3 phr
Zinc Oxide - 5 phr
56% Chlorinated Paraffin (liquid) - 10 phr
70% Chlorinated Paraffin (wax) - 25 phr
Aluminum Trihydrate - 30 phr
Stearic Acid - 1 phr
Precipitated Whiting - varied*
Flame Retardant – 0-20**

** The precipitated whiting was varied to maintain a constant total flame retardant and whiting of 50 phr.*



SHERWIN-WILLIAMS CHEMICALS

Technical Service: 601 Canal Road, Cleveland, OH 44113 USA; Ph#: (216) 566-2944, Fax#: (216) 566-3837
Customer Service: Post Office Box 1028, Coffeyville, KS 67337 USA; Ph#: (620) 251-0072, Fax#: (620) 251-7276

www.kemgard.com